

#### **Technical Data Sheet**

# 1.4 mm Height Subminiature, Axial Flat Top View LED

#### 28-21SUGC/S400-A4/TR8

#### **Features**

- Package in 12mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- EIA Std. package.
- Mono-color type.
- Pb-free
- The product itself will remain within RoHS compliant version.

#### **Descriptions**

- The 28-21 SMD LED is much smaller than leaded components. Thus enable smaller board size. Higher packing density. Reduced storage space and finally smaller equipment to be obtained.
- Besides, light weight makes them ideal for miniature applications.
- Furthermore by automation assembly machines the accuracy is anticipated.

#### **Applications**

- Small indicator for indoor applications.
- Flat backlight for LCD, switches and symbols.
- Indicator and backlight in office equipment.
- Indicator and backlight for battery driven equipment.
- Indicator and backlight for audio and video equipment.
- Backlighting in dashboards and switches.
- Telecommunication: indicator and backlighting in telephone and fax.

#### **Device Selection Guide**


D. AN.	Chip	F 44 . 1 C . 1	Resin Color	
Part No.	Material	Emitted Color		
28-21SUGC/S400-A4/TR8	InGaN	Brilliant Green	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 9


Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen




# **Package Outline Dimensions**

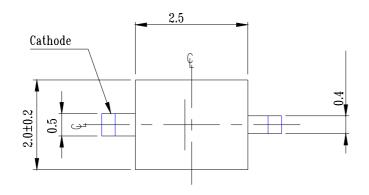



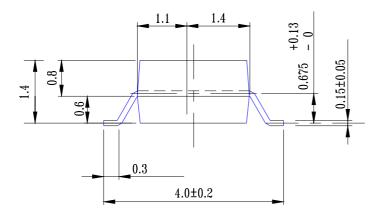



Note: The tolerances unless mentioned are  $\pm 0.1$ , unit=mm.

Everlight Electronics Co., Ltd.

Device No.: SZDLE-281-

http://www.everlight.com

Prepared date: 08-Apr-2009

Rev. 2 Page: 2 of 9

Prepared by: Qilong Chen



# 28-21SUGC/S400-A4/TR8

# **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit	
Reverse Voltage	$V_R$	5	V	
Forward Current	$I_{\mathrm{F}}$	25	mA	
Peak Forward Current (Duty 1/10 @ 1KHz)	$I_{\mathrm{FP}}$	100	mA	
Power Dissipation	Pd	95	mW	
Electrostatic Discharge(HBM)	ESD	150	V	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 ~ +100	$^{\circ}\mathbb{C}$	
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.		


## **Electro-Optical Characteristics (Ta=25°C)**


Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	$I_V$	112	167		mcd		
Viewing Angle	2 \theta 1/2		150		deg		
Peak Wavelength	λp		518		nm	I <sub>F</sub> =20mA	
Dominant Wavelength	λd		525		nm		
Spectrum Radiation Bandwidth	Δλ		35		nm		
Forward Voltage	$V_{F}$	2.7	3.3	3.7	V		
Reverse Current	$I_R$			50	$\mu$ A	$V_R=5V$	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 9


Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen


### **Typical Electro-Optical Characteristics Curves**














Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 9

Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen

### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



### **Reel & Carrier Tape Dimensions**

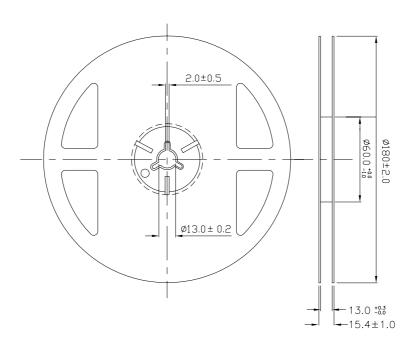


Note: The tolerances unless mentioned are  $\pm 0.1$ , unit=mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 5 of 9


Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen

## Loaded quantity per reel 2000 PCS/reel

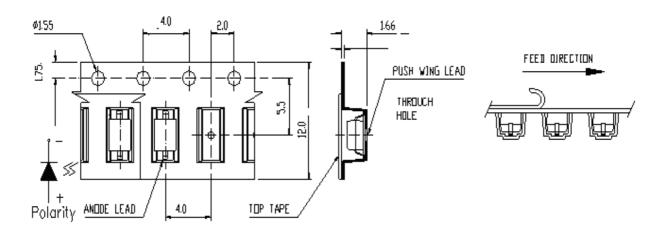

**Note:** Tolerances Unless Dimension is  $\pm 0.1$ mm , Unit = mm

### **Moisture Resistant Packaging**

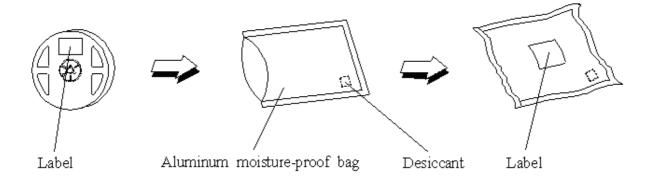

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 9

Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen



### 28-21SUGC/S400-A4/TR8

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90 %

LTPD: 10 %

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5 sec.	6 Min.	22 Pcs.	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15 min. $\int 5 \text{ min.}$ $L: -40^{\circ}C$ 15 min.	300 Cycles	22 Pcs.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5 min. $\int 10 \text{ sec.}$ $L: -10^{\circ}\mathbb{C}$ 5 min.	300 Cycles	22 Pcs.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 Pcs.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 Pcs.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 Pcs.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 Pcs.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 9

Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen



#### 28-21SUGC/S400-A4/TR8

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.

#### 3. Soldering Condition

3.1 Pb-free solder temperature profile

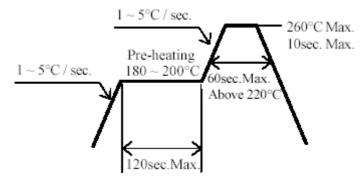

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 9

Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen




#### 28-21SUGC/S400-A4/TR8

#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

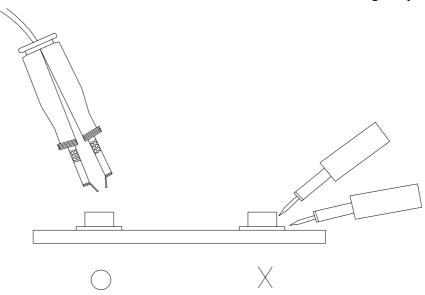

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 9 of 9

Device No.: SZDLE-281- Prepared date: 08-Apr-2009 Prepared by: Qilong Chen